

PRIMAFUGA **TOP**



- TWO PART ANTIACID ADHESIVE-GROUTING MIXTURE FOR JOINTS
- BEAUTIFUL FINISH, VERY EASY APPLICATION
- HIGH CHEMICAL RESISTANCE
- NON-ABSORBENT, ANTI-STAIN, ANTI-MOULD, ANTI-BACTERIAL
- FIXING ALL TYPES OF TILES AND MAKING ALL TYPES OF JOINT FROM 2 TO 10 MM WIDE ON TILED FLOORS AND COVERS (EXCEPT FOR ABSORBENT SURFACES) IN:
 - SAUNAS, SPAS, WELLNESS CENTRES, THERMAL CENTRES, ETC
 - SWIMMING POOLS TUBS CONTAINING EVEN SEA WATER OR SOME CHEMICALLY AGGRESSIVE LIQUIDS;
 - LABORATORY BENCHES, KITCHEN BENCHES, HOSPITALS
- EVERYWHERE YOU WANT TO ACCOMPLISH A COATING WITH SOME FEATURES OF HIGHER DURATION, CLEANING FACILITY AND BEAUTY

Prima Fuga Top is a special two part product with an epoxy resin base, selected quartzes and special additives suitable for sticking and grouting all types of ceramic floorings and coverings onto a wide variety of bases, possessing exceptional qualities of impermeability and resistance to chemical and mechanical attacks. Designed to harden rapidly and without shrinking, easily cleaned with water, Prima Fuga Top is non-absorbent, anti-stain, anti-mould, anti-bacteria and guarantee an aspect and a resistance to ageing and a cleanness of the joint that can not be obtained with traditional grouts.

Prima Fuga Top is available in various colours which can be enriched with a pearly additive (to give a mother-of-pearl effect), with a photo-luminescent additive (which makes the sealant visible for 30 minutes after darkness falls), or with coloured glitter to give a "metallic" effect to enhance the beauty of the covering.

The use of these additives is not recommended when there is frequent contact with particularly aggressive substances like those indicated in the table on the last page of the technical specifications.



COVERAGE: As a grout the coverage is strongly influenced by the size and thickness of the tile together with the width of the joints which must not exceed 10 mm and it changes from about 0,8 to 2,5 kg/m².

As an adhesive it depends on the condition of the substrate and the type of trowel utilized. With a smooth support base and using a spatula with 5x5 / 10x10 squared teeth, consumption is 2.5/5 kg/m².



TECHNICAL ASSISTANCE

0039 051 831273
info@benfer.it



RC PRODUCTS INSURANCE GUARANTEE

All our products are covered by an Insurance Guarantee for manufacturing defects



TECHNICAL MEETINGS

Periodic technical/professional training



CERTIFICATIONS



FOR PROFESSIONAL USE

Consult the technical specifications available at www.benfer.it

data collected at 23° and 50% of r.h.



YOU ARE HERE...


- GROUTING OF TILE JOINTS
- ANTIACID GROUTS
- **PRIMAFUGA TOP**



WHITE

WHITE + PEARLY

WHITE + SILVER GLITTER

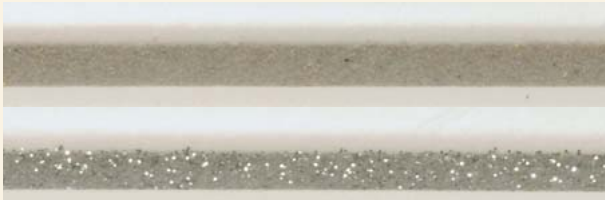


GREY

GREY + SILVER GLITTER



YELLOW

YELLOW + GOLD GLITTER

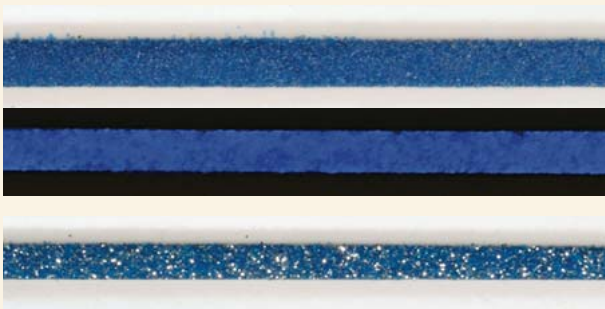

BLUE

BLUE + PHOTO-LUMINESCENT

BLUE + SILVER GLITTER

CONSULT THE TECHNICAL SPECIFICATIONS AVAILABLE AT www.benfer.it

PRODUCT TECHNICAL DATA

CONSISTENCY	PART. A DOUGHY. PART. B FLUID PASTE.
COLOUR	PART. A SEE TABLE. PART. B BROWN
CONSERVATION	12 MONTHS IN THE ORIGINAL CLOSED PACKAGE, AT + 10°C
DANGER OF HARM	PART. A IRRITANT PART. B CORROSIVE
FLAMMABILITY	NO
MIXING RATIO	PART. A / PART. B 9:1
SPECIFIC WEIGHT	1,6 Kg/dm ³
COVERAGE AS A GROUT	SEE TABLE Page 99
APPLICATION TEMPERATURE	FROM + 15°C TO + 30°C
MIXTURE POT LIFE	45 MINUTES
WALKOVER TIME WITH CAUTION FOR GROUTING	
ON DRY SUPPORTS AT 23°C	24 HOURS
WALKOVER TIME ON DRY SUPPORTS AT 23°C	15 DAYS

FINAL PERFORMANCES

DAMP RESISTANCE	OPTIMUM
AGEING RESISTANCE	OPTIMUM
RESISTANCE TO THE ACIDS	GOOD
RESISTANCE TO THE ALKALI	OPTIMUM
RESISTANCE TO OILS	GOOD
RESISTANCE TO TEMPERATURE	FROM - 20°C TO + 100°C
CONFORMS TO	EN13888 CLASS RG - EN 12004 CLASS R2T



TECHNICAL ASSISTANCE
0039 051 831273
info@benfer.it



RC PRODUCTS INSURANCE GUARANTEE

All our products are covered by an Insurance Guarantee for manufacturing defects



TECHNICAL MEETINGS

Periodic technical/professional training



CERTIFICATIONS



FOR PROFESSIONAL USE

Consult the technical specifications available at www.benfer.it

data collected at 23° and 50% of r.h.



YOU ARE HERE...

- GROUTING OF TILE JOINTS
- ANTIACID GROUTS
- PRIMAFUGA TOP