



BENFER FLEX + S1

Highly flexible, multi-purpose adhesive, applicable in thickness up to 20 mm, can be used as flow bed adhesive


Specific characteristics for the application of large formats and in difficult situations

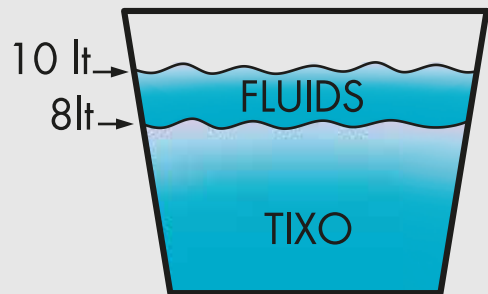


Variable mixing ratio:
• 32% - 8 liters of water: thixotropic adhesive
• 40% - 10 liters of water: flow-bed adhesive
It allows working always with the best consistency to obtain the best performance with minimum effort.

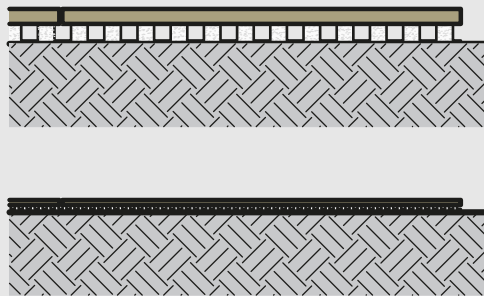

To be applied with a trowel in thickness from 3 to 20 mm.
For the application of any format thick or thin, easier, in any condition, on every substrate.

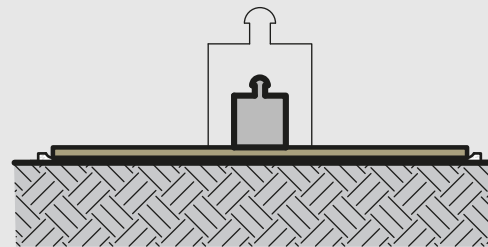

Easily deformable.
It requires less pressure on tiles to obtain 100% coverage of adhesive on the back of the tile.

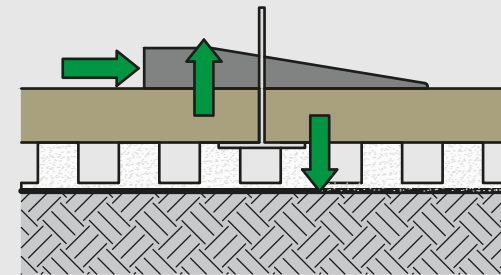

It follows the movements of the tile during the application for a perfect planarity of the floor.